

SINCE 1908
wessels
company

SUBMITTAL

NLA-HP-SERIES
 HVAC EXPANSION TANKS

Models: NLA-1000-HP to NLA-15000-HP

Submittal Sheet No. A-1009B Rev. 1 6/13/2018

Job Name _____	Submitted By _____	Date _____
Location _____	Approved By _____	Date _____
_____	Order No. _____	Date _____
Engineer _____	Notes _____	_____
Contractor _____	_____	_____
Sales Rep. _____	_____	_____

Description:

Wessels patented NLA-HP (High Pressure) Tanks are ASME removable bladder type pre-charged HVAC expansion tanks. They are designed to absorb the expansion forces and control the pressure in heating/cooling systems. The system's expanded water (fully compatible with water/glycol mixtures) is contained in a full acceptance heavy-duty butyl bladder that prevents tank corrosion and waterlogging problems. All NLA expansion tanks can be installed vertically or horizontally.

Construction:

Shell: Carbon Steel
 Heads: Carbon Steel
 Exterior: Carbocoat 140 - Harvester Red
 Interior: Heavy Duty Butyl Bladder

Design Parameters:

Maximum Design Pressure: _____*
 Temperature Range: -20°F to 240°F

Model Number	Part Number 150 PSI	Part Number 200 PSI	Part Number 250 PSI	Part Number 300 PSI	Tank Volume (Gallons)	Tagging Information	Quantity
NLA-1000-HP	22021000	22041000	22051000	22061000	264		
NLA-1200-HP	22021200	22041200	22051200	22061200	317		
NLA-1400-HP	22021400	22041400	22051400	22061400	370		
NLA-1600-HP	22021600	22041600	22051600	22061600	422		
NLA-2000-HP	22022000	22042000	22052000	22062000	528		
NLA-2500-HP	22022500	22042500	22052500	22062500	660		
NLA-3000L-HP	22023000	22043000	22053000	22063000	792		
NLA-3000S-HP	22023001	22043001	22053001	22073001	792		
NLA-4000-HP	22024000	22044000	22054000	22064000	1056		
NLA-5000-HP	22025000	22045000	22055000	22065000	1320		
NLA-7500-HP	22027500	22047500	22057500	22067500	1980		
NLA-10000-HP	22029999	22049999	22059999	22069999	2640		
NLA-15000-HP	22029998	22049998	22059998	22069998	3963		

Typical Specification


Furnish and install, as shown on plans, a _____ gallon _____" diameter X _____" (high) pre-charged steel HVAC expansion tank with heavy-duty butyl bladder. The tank shall have multiple water-side connections to eliminate stagnate water within the tank, a 0.302"-32 charging valve connection (standard tire valve) to facilitate the on-site charging of the tank to meet system requirements, a pressure gauge, and bladder integrity monitor. The tank must be constructed in accordance with the most recent addendum of Section VIII Division 1 of the ASME Boiler and Pressure Vessel Code and rated for _____ psig.

Each tank shall be Wessels model number NLA-_____-HP or approved equal.



SINCE 1908
wessels
company

101 Tank Street Greenwood, IN 46143
 P: 317-888-9800 F: 317-865-7411
 www.westank.com




SINCE 1908
wessels
 company

SUBMITTAL

NLA-HP-SERIES
 HVAC EXPANSION TANKS

Models: NLA-1000-HP to NLA-15000-HP
 Submittal Sheet No. A-1009B Rev. 1 6/13/2018

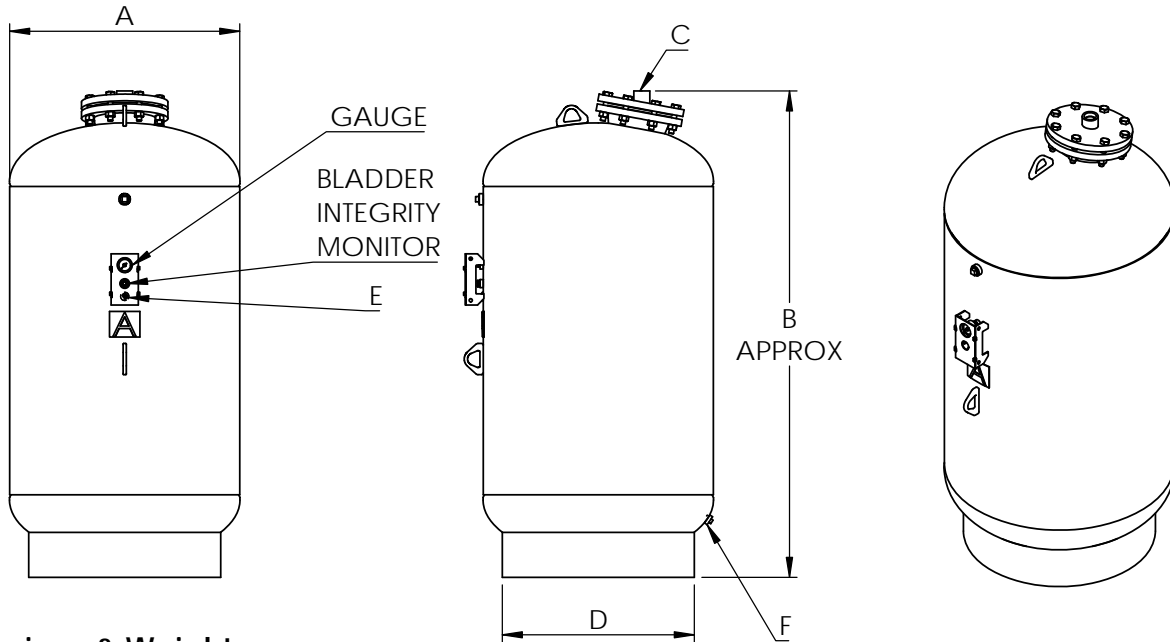

Dimensions & Weights:

Model Number	Dimensions in Inches						Approx. Shipping Weight (lbs)			
	A	B	System Connection	D	Charging Valve	Drain	150 PSI	200 PSI	250 PSI	300 PSI
			C		E	F				
NLA-1000-HP	36	75	1 1/2 NPT	30	0.302"-32NC	3/4 NPT	596	698	830	978
NLA-1200-HP		87					676	905	1118	1408
NLA-1400-HP		99					756	1107	1330	1670
NLA-1600-HP	74	1222		1413			1713	2105		
NLA-2000-HP	48	87		42			1399	1643	2026	2352
NLA-2500-HP		102					1548	1935	2352	2906
NLA-3000L-HP		122	1890		2198	2782	3444			
NLA-3000S-HP	60	80	2 NPT	54	2371	2694	2965	3487		
NLA-4000-HP		102			2586	3291	3736	4386		
NLA-5000-HP		125			3041	3858	4485	5305		
NLA-7500-HP	72	127	3 NPT	66	1 NPT	4392	5491	6583	7614	
NLA-10000-HP		163				5437	6796	8068	9397	
NLA-15000-HP		233				7851	9814	12030	13564	

Notes:

- Tanks are factory pre-charged at 40 psig and field adjustable.
- California code-sight glass is available upon request.
- Mounting clips are available upon request.
- Tanks installed horizontally must have the system connection below the horizontal centerline of the tank.
- U.S. Patent No. 8,633,825 B2.



SINCE 1908
wessels
 company

101 Tank Street Greenwood, IN 46143
 P: 317-888-9800 F: 317-865-7411
 www.westank.com